



PT Thubas Liftindo Perkasa

Head Office

Gang Wates Kp. Rawa Banteng No.102 Rt 003/01 Ds. Mekarwangi
Kec. Cikarang, Barat, Kabupaten Bekasi, Jawa Barat 17530

Branch Office

Bypass Pandaan, Jl. Raya Surabaya – Malang No.8, Sukorejo,
Karang Jati, Kec. Pandaan, Pasuruan, Jawa Timur 67156

Mobile : +62 878 4688 0298
Email : cs.thubasliftindoperkasa.com
Website : thubasliftindoperkasa.com

LG-PB-CLG2025/30MJ-082020-EN



Liuzhou LiuGong Forklift Co., Ltd.

no. 1 Yanghe Road, Liuzhou, Guangxi 545007, PR China T:
+86 772 388 6124E: overseas@liugong.com
HQ: www.liugong.com
MH: www.lgforklift.cn

Like and follow us:



Model
engine's type
Control
load capacity

CLG2025/30MJ
Manual
stop
2500 / 3000kg

CLG2025/30MJ
MANUAL
HYDRAULIC
TROLLEYS

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options vary by regional availability.

HARD WORLD. RELIABLE TECHNOLOGY.



MANUAL HYDRAULIC TROLLEYS WITH ABOVE QUALITY

SUPERIOR DESIGN

A first-class range of pallet trucks with excellent design.

APPLICABLE LOCATION

Professional and ideal storage medium for all types of manual transport over short distances in stores and warehouses as well as factories.

RELIABLE, ROBUST

The professional and ideal storage medium for all the various tasks of manual transport over short distances in stores and warehouses as well as factory plants.


STABLE PERFORMANCE

All pivot points are lubricated for excellent maneuverability with easy handling Chrome-plated bearing bushes and pivots ensure quiet running and particularly long service life.




BUILT-IN HYDRAULIC PUMP

Excellent galvanized one-piece casting hydraulic pump, strong and durable, with fine control of lowering speed and overload valve, low scheduled maintenance.

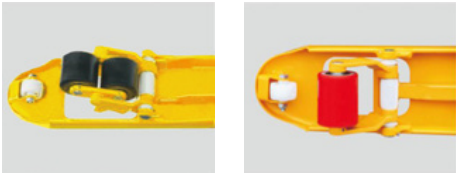

SINGLE OPTION AND TANDEM FORK ROLLERS

Additional input and output fork rollers guarantee maximum stability and safety when transporting goods on slopes.

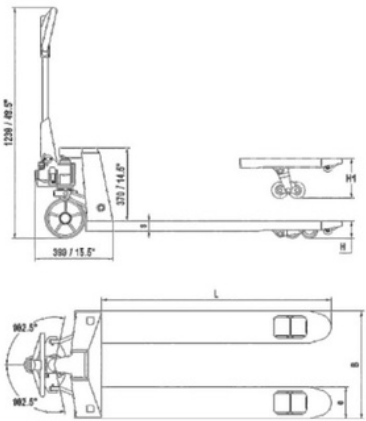

SPECIFICATION

HAND CARTS		1KG=2.2LB 1INCH=25.4MM			
Model		CLG2025MJ		CLG2030MJ	
Load capacity Q	kg	2500		3000	
Fork height in lower position h	mm	85	75	85	75
Maximum lifting height h1	mm	20	19	20	19
Steering wheel size	mm	200x5	180x5	200x5	180x5
Fork roller size, single	mm	0	0	0	0
Fork roller size, paired	mm	80X93	74X93	80X93	74X93
Fork dimensions e*s	mm	80X70	160X50 74X70	80X70	160X50 74X70
Distance between outer edges of forks B	mm	540/68		540/68	
Fork length l	mm	1550/1220		1550/1220	

Conforms to EN 1757-2

ERGONOMIC PEN



Ergonomic handle with comfortable rubber grip provides optimal safety and comfort. Three-position operating lever handle for lifting, transporting

and lowering.

Down position - to reduce the load, pull up the tip of the control finger.

Neutral Position - Place the tip of the control finger in this position while pulling the cart or loading.

Lift Position - To lift the load, press down on the control fingertip, the pump handle to lift the load.

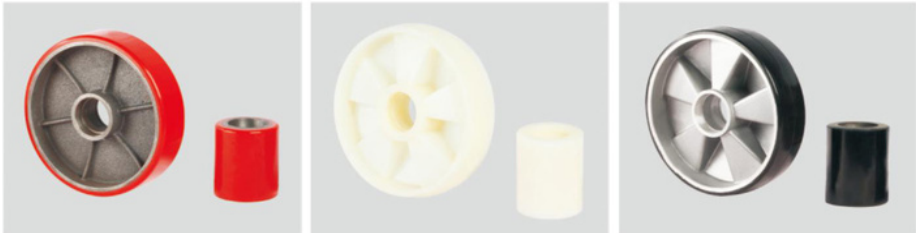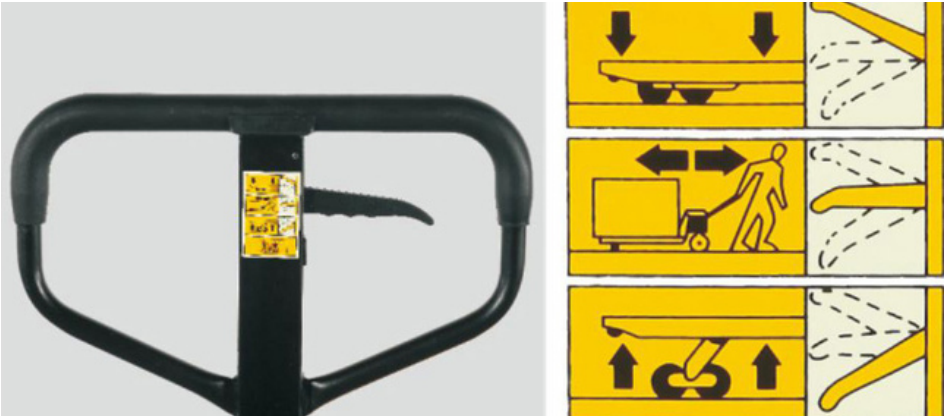

Option of different coating material for both handlebars and fork rollers.

Polyurethane - ideal for delicate floors with wear-resistant and non-marking properties, quiet and durable.

Nylon - Low resistance force, high resistance to chemicals, no markings, preferred in the food, fish and chemical industries with smooth, even floors.

Rubber is the best choice for quiet and durable requirements, ideal for smooth and rough floors.

DOUBLE FORK ROLLERS

Ideal for heavy loads and uneven floors.