



PT Thubas Liftindo Perkasa

PT Thubas Liftindo Perkasa

Head Office

Gang Wates Kp. Rawa Banteng No.102 Rt 003/01 Ds. Mekarwangi
Kec. Cikarang, Barat, Kabupaten Bekasi, Jawa Barat 17530

Branch Office

Bypass Pandaan, Jl. Raya Surabaya – Malang No.8, Sukorejo,
Karang Jati, Kec. Pandaan, Pasuruan, Jawa Timur 67156

Mobile : +62 878 4688 0298

Email : cs.thubaslifindoperkasa.com

Website : thubaslifindoperkasa.com

Engine

Fuel type

Load capacity @ 600 mm LC

Isuzu A-6BG1QC-02 / 6.49 L

Diesel

6,000 kg

CLG2060H

DIESEL LOADER C
PNEUMATIC TIRES



 **LIUGONG**



Tough world. Tough equipment.

CLG2060H Specifications>>>

Are common	Model	1			CLG2060H
	Fuel type	2			Diesel
	load capacity	3	With designated DH	kg	6,000
	Center of gravity	4		mm	600
Weight	Operating weight	5	without load	kg	8,500
	axle load	6	loaded front/rear	kg	12,950 / 3,800
		7	unloaded front/rear	kg	1,550 / 4,700
Tires	Tire type	8			Pneumatic
	wheels	9	front/rear		4/2
	Wheelbase	10		mm	2,250
	Tire size	11	front		8.25-15-14PR
		12	rear		8.25-15-14PR
Mast	Track width	13	front/rear		1,474 / 1,730
	Max. fork height	14	standard two-piece mast	mm	3,000
	free lift	15	standard two-piece mast	mm	210
	Height, mast down	16	standard two-piece mast	mm	2,534
	Height, mast raised	17	standard two-piece mast	mm	4,377
	mast tilt, forward/backward	18	standard two-piece mast	deg	6°/12°
	Carriage	19	width	mm	1,840
	Fork span	20	minimum/maximum	mm	300 / 1,840
	Fork dimensions	21	T x W x D	mm	65 x 150 x 1,520
	Fork back length	22	standard two-piece mast	mm	3,573
Chassis	Overall width	23		mm	2,040
	Head Guard Height	24		mm	2,520
	turning radius	25	minimum external	mm	3,500
	Fork overhang	26	standard two-piece mast	mm	592
	Min. turning aisle width	27	cargo length and stock	mm	5,093
		28	at minimum load	mm	203
	Clearance	29	in the center of the wheelbase	mm	250
		30			
Performance	Travel speed	31	with/without load	km/h	23/25
	lifting speed	32	with/without load	m/s	0.46 / 0.53
	Lowering speed	33	with/without load	m/s	0.55 / 0.40
	Max. pulling force	34	loaded front/rear	kg	5,500
	max. gradeability	35	with load / without load	%	24/20
Systems	brakes	36	worker		foot/hydraulic
		37	parking lot		manual/mechanical
		38	manufacturer		Isuzu
		39	model		A-6BG1QC-02
	Engine	40	compliance with emission limit values		Euro Stage I
		41	cylinders		6
		42	engine capacity	liter	6.49
			power	kW/rpm	82.4 / 2,000
			Max torque	Nm/rpm	416.8 / 1,500

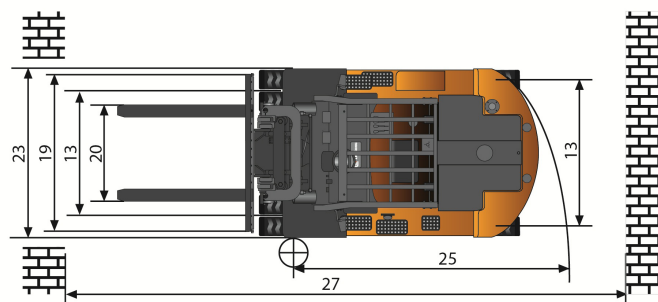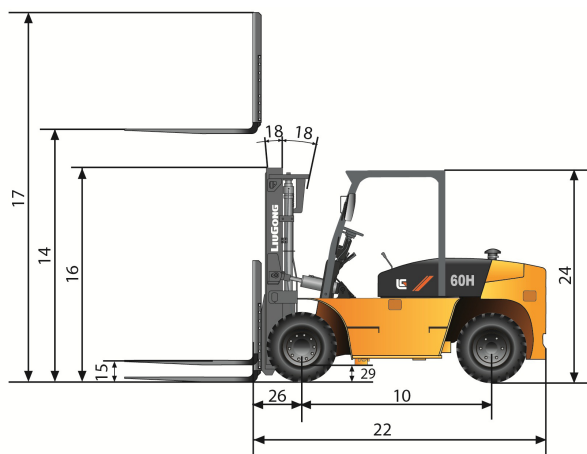

guangxi liugong machinery co., ltd.

no. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

06/2017 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.